

▼General description



- Super slim width with board width only 4mm,Ultra-slim thickness of 1.2mm, matching profiles better
- Self-encapsulated design offers 4 optional 2700-6000K white lights
- With life span over 36000H
- Ta: -25~40°C; Tc: 75°C (max)




led4

▼Dimension

- Max.length: 5000mm
- Cutting unit: 7leds/50mm (1.97")
- LED pitch: 7.14mm(0.28")
- Min. bend diameter: Φ60mm
- Mounting: 3M tape
- IP: IP20/IP65
- ※Warranty: 5years

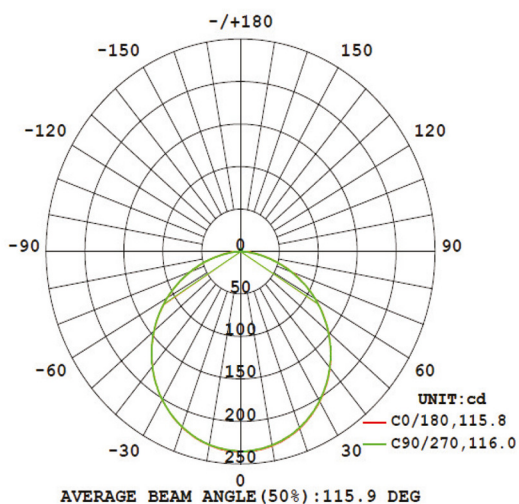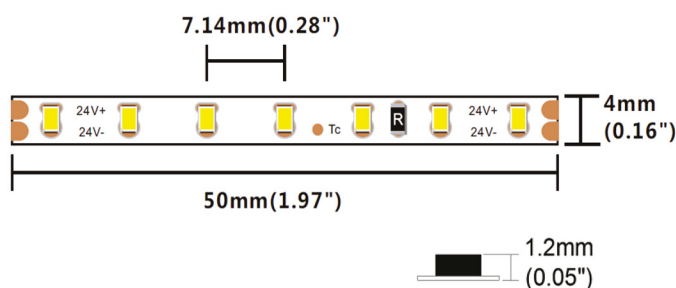

Photometric of 1M strip

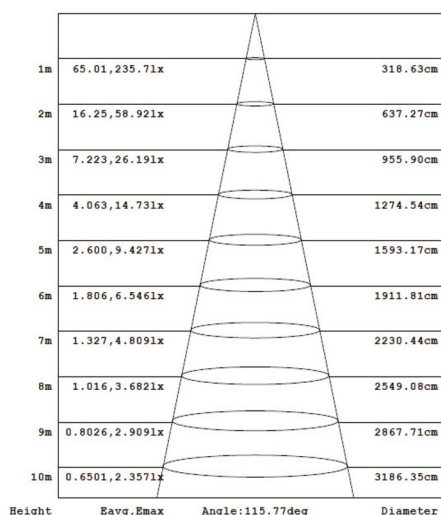

AAI Figure

▼Electronic & output data

- Input voltage: DC24V
- Rated current: 0.275A(1m) /1.1A(5m)
- Typical Power: 6.6W(1m) /26.4W(5m)
- CRI: >90
- Max.power: 7.2W(1m)
- On-off times: 10000 (test times)
- Power range: 6 ~ 7.2W(1m)
- Copper foil: 2oz

CRI	Color	CCT	Lumen(lm)	lm/W	Energy efficiency class
Ra>90	SW	2700K	660	100	F
Ra>90	WW	3000K	685	104	F
Ra>90	NW	4000K	710	108	F
Ra>90	W	6000K	685	104	F