




【General description】

- Three-wire adjustable toning and high-dense strip makes it widely match all kinds of controllers
- Ultra-slim thickness of 1.2mm, matching profiles better
- CRI 90, With life span over 36000H
- Ta: -25~40°C; Tc: 75°C (max)

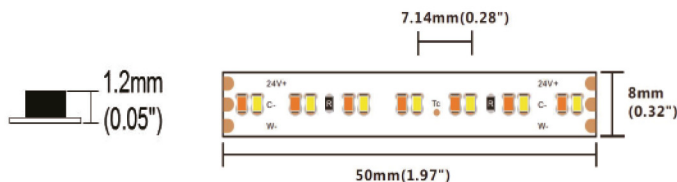

【Dimension】

Input voltage: DC24V	Max.length: 5000mm(16.4')
CRI: 90	Cutting unit: 14leds/50mm(1.97")
Max.power: 16.5W(1m)	LED pitch: 7.14mm(0.28")
Power range: 13.5~16.5W(1m)	Min. bend diameter: Φ60mm(2.36")
Rated current: 0.625A(1m) 2.6A(5m)	Mounting: 3M tape
Typical Power: 15W(1m) 62.4W(5m)	Copper foil: 2oz
tape IP: IP20/IP65/IP67	
On-off times: 10000 (test times)	
Warranty: 5years	
(Warranty is based on indoor use)	



【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>90	SWW	2700K-6000K	1575	480	105	F
Ra>90	SW	2700K	750	228	100	F
Ra>90	W	6000K	825	251	110	F

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/Imertter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.