






## 【General description】

- Reel to reel process, no soldering joint.
- Light line and dot-free with big emitting angle
- 4 optional 2700K/3000K/4000K/6500K.
- suit for furniture lighting and decorative lighting application.

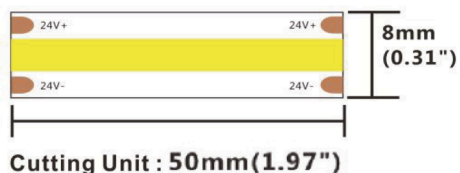

## 【Dimension】

Input voltage: DC24V	Max.length: 5000mm(16.4')
CRI: >90	Cutting unit: 50mm(1.97")
Max.power: 10.5W(1m)	LED pitch: /
Power range: 8.6 ~10.5W(1m)	Min. bend diameter: $\Phi$ 60mm(2.36")
Rated current: 0.4A(1m) 1.75A(5m)	Mounting: 3M tape
Typical Power: 9.6W(1m) 42W(5m)	Copper foil: 2oz
tape IP: IP20/IP65	
On-off times: 10000 (test times)	
Warranty: 3years (Warranty is based on indoor use)	



## 【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
Ra>90	SW	2700K	800	244	83	G
Ra>90	WW	3000K	800	244	83	G
Ra>90	NW	4000K	910	277	95	F
Ra>90	W	6500K	1000	305	104	F

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1mterter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.