

▼General description


- Light line and dot-free with big emitting angle
- CRI>90,100LM/W,1500LM/M
- Easy installation and maintaining
- 2700K\3000K\4000K\6500K\R\G\B optional

led4





▼Dimension


- ※Max.length: 5000mm
- Cutting unit: 29.41mm
- Min. bend diameter: Φ 60mm
- Mounting: 3M tape
- IP: IP20/IP65/IP67
- ※Warranty: 3years

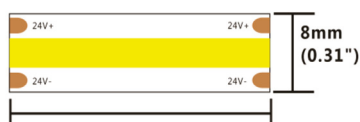

Cutting Unit :29.41mm(1.16")

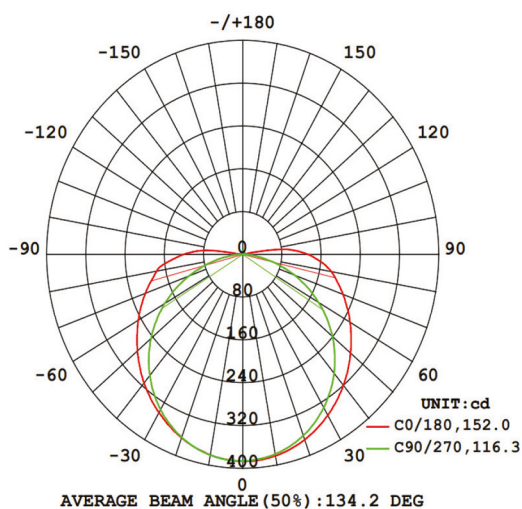

Photometric of 1M (4000K) strip

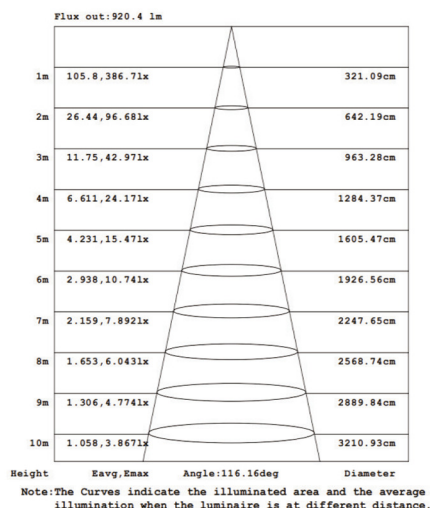

AAI Figure

※Max.length data is based on 10% voltage drop

※Warranty is based on indoor use

▼Electronic & output data

Input voltage: DC24V

Typical Power: 15W(1m) /49.7W(5m)

Max.power: 16.8W

Power range: 13.2 ~ 16.8W

Rated current: 0.63A(1m) /2.07A(5m)

CRI: >90

On-off times: 10000 (test times)

Copper foil: 2oz

CRI	Color	CCT	Lumen(lm)	lm/W	Energy efficiency class
Ra>90	SW	2700K	1230	82	/
Ra>90	WW	3000K	1350	90	/
Ra>90	NW	4000K	1470	98	F
Ra>90	W	6500K	1500	100	F