

▼General description

- Reel without soldering joint, high cost effective
- cUL/CE certificated
- 3 years warranty
- IP20/IP55/IP65 applied



led4

▼Dimension

Max.length: 5000mm(196.85")

Cutting unit: 6leds/50mm(1.97")




LED pitch: 8.33mm(0.33")

Min. bend diameter: Φ 60mm(2.36inch)


Mounting: 3M tape

IP: IP20/IP55/IP65

Warranty: 3years

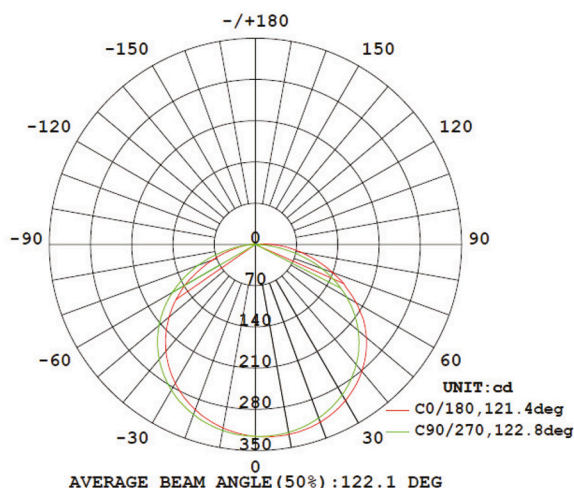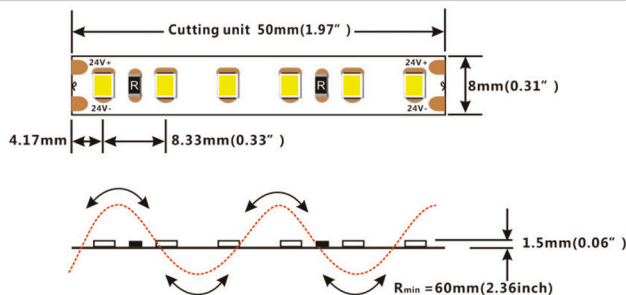

Photometric of 1M strip

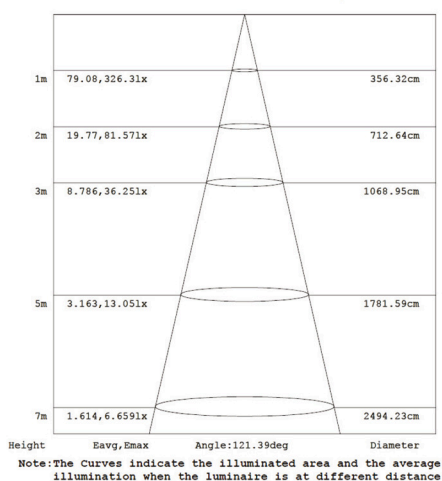

AAI Figure

※Max.length data is based on 10% voltage drop

※Warranty is based on indoor use

▼Electronic & output data

Input voltage: DC24V

Typical Powe: 8.8W(1m)/(2.68W/FT) /43W(5m)

Max.power: 9.6W(2.93W/FT)

Power range: 8~9.6W

Rated current: 0.37A(1m) /1.79A(5m)

CRI: 80

On-off times: 10000 (test times)

Copper foil: 2oz

CRI	Color	CCT	Lumen(lm)	lm/W	Energy efficiency class
Ra>80	SW	2700K	900	93	A+
Ra>80	WW	3000K	960	100	A+
Ra>80	NW	4000K	1040	112	A+
Ra>80	W	6000K	1000	104	A+