




【General description】



- RGB colorful strip
- Widely adaptable to all types of controllers
- High quality FPC, high thermal 3M adhesive
- Ta: -25~40°C; Tc: 75°C (max)

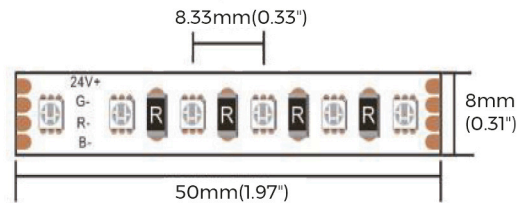

【Dimension】

Input voltage: DC24V
CRI: /
Max.power: 11W(1m)
Power range: 9.1~11W(1m)
Rated current: 0.42A(1m) 1.9A(5m)
Typical Power: 10W(1m) 45.6W(5m)
tape IP: IP20/IP65
On-off times: 10000 (test times)
Warranty: 3years
(Warranty is based on indoor use)

Max.length: 5000mm(16.4')
Cutting unit: 6leds/50mm(1.97")
LED pitch: 8.33mm(0.33")
Min. bend diameter: Φ 60mm(2.36")
Mounting: 3M tape
Copper foil: 2oz



【Photo-electric Parameters】

CRI	Color	CCT	Lumen(lm/m)	Lumen(lm/ft)	lm/W	ErP 2019
/	R	R:620-625nm	80	24	21	/
/	G	G:520-525nm	285	86	88	/
/	B	B:455-460nm	65	19	21	/
/	RGB	/	430	131	43	/

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1merter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.