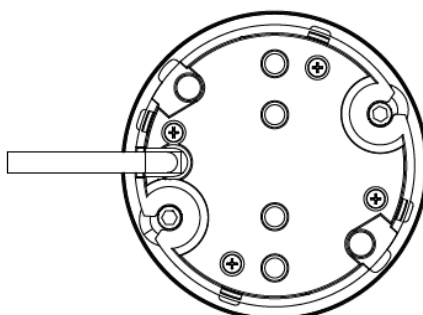
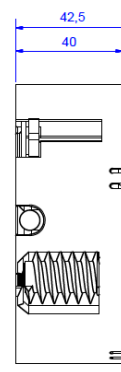
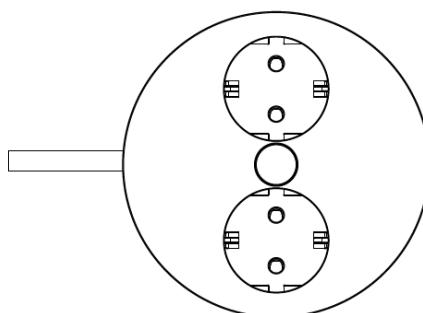



TWIST 2 Tomas	TWIST 2S
Descripción: - Conjunto eléctrico para instalación en superficies de cocinas como madera, plástico laminado, piedra natural o cristal, y en oficinas y salas de reuniones. - Al apretar y girar la tapa circular, accedemos a un marco doble para conectores keystone y a una toma schuko, ofreciendo una conexión correcta y segura. - Posibilidad de guiar el cable hacia abajo o lateralmente	Description: - Electrification unit for installation for kitchen worktops like wood, laminated plastic, natural stone or glass resp. in office and conference tables. - When cover disk is pushed and turned, two safety sockets emerge that offer a convenient and safe power supply. - Cable guidance possible to the bottom or to the side.
Tomas: - Según IEC 60884, VDE 0620-1 - Toma contacto tierra bipolar 16A/3680W, AC250V, IP20, con protección infantil - Negro	Sockets: - According IEC 60884, VDE 0620-1 2-pole with earthing contact 16A/3680W, AC250V, IP20, with child protection - Black
Conexión: - Cable 2m H05VV-F 3G1,5mm² negro, cable pelado - Clavija schuko negra	Connection: 2,0m H05VV-F 3G1,5mm² black with endsleeves - German type mounting plug black enclosed

Montaje: • Agujero circular con Ø105(+1)mm • Superficies con grosor a partir de 8mm • Fijación mediante dos tornillos hexagonales M6 con pinza (llave Allen No.5), para instalaciones <30mm • Fijación mediante dos tornillos de presión M6 (llave Allen No.5) para instalaciones de 30mm	Mounting: • In round hole with Ø105(+1)mm • For mounting in plates with minimum thicknesses of 8mm • Fixing via two mounted hexagon socket screws M6 with claws (Allen wrench No. 5) for installation thicknesses <30mm • Resp. via two straining screws M6 (Allen wrench No. 5) for installation thicknesses of 30mm
Material: • Plástico: negro, PA6 GF 30 V1 , resistente hasta 850°C (cable incandescente) • Disco cubierta/cierre: Zn fundido, Níquel recubierto y terminado, superficie circular pulida en mate, "parecido acero inoxidable"	Material: • Plastic: Black, PA6 GF 30 V1, glow wire resistant up to 850°C • Cover disk/lock: Zn die-casted, Nickel coated and finished, round polishing in matt surface, "stainless steel look"
Medidas: • Altura total: aprox. 42,5mm • Profundidad de instalación: aprox. 40mm • Diámetro exterior: aprox. 115mm	Measurements: • Total height: approx. 42,5mm • Installation depth: approx. 40mm • Outer diameter: approx. 115mm
Packing: • Caja de cartón	Packing: • In carton box
Entrega: • 1x TWIST 2S • 1x instrucciones de monataje	Extent of delivery: • 1x TWIST 2S • 1x Mounting instruction